

# Skin-On Interfaces: A Bio-Driven Approach for Artificial Skin Design to Cover Interactive Devices

Marc Teyssier<sup>1</sup>, Gilles Bailly<sup>2</sup>, Catherine Pelachaud<sup>2</sup>, Eric Lecolinet<sup>1</sup>, Andrew Conn<sup>3</sup>, Anne Roudaut<sup>3</sup>

<sup>1</sup>LTCI, Télécom Paris, Institut  
Polytechnique de Paris, France

<sup>2</sup>Sorbonne Université, CNRS,  
ISIR, Paris, France

<sup>3</sup>University of Bristol  
Bristol, UK

name.surname@{<sup>1</sup>telecom-paristech.fr,<sup>2</sup>upmc.fr,<sup>3</sup>bristol.ac.uk}

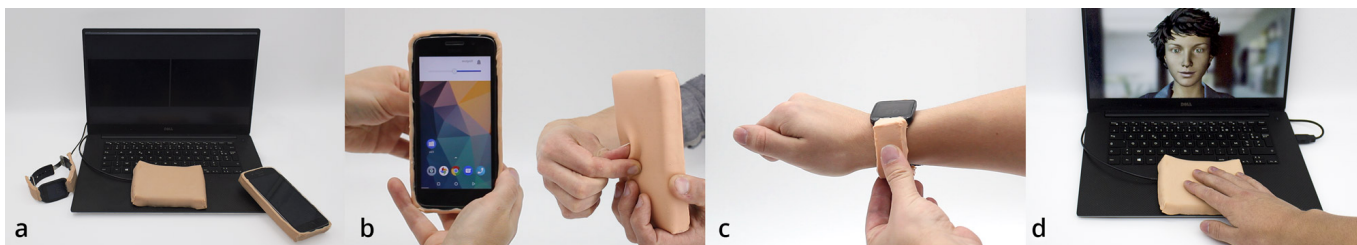


Figure 1. Skin-On Interface (a) is a new paradigm in which we augment interactive devices such as (b) smartphone, (c) interactive watches or (d) touchpad with artificial skin. It enables new forms of input gestures for interface control and emotional communication.

## ABSTRACT

We propose a paradigm called Skin-On interfaces, in which interactive devices have their own (artificial) skin, thus enabling new forms of input gestures for end-users (e.g. twist, scratch). Our work explores the design space of Skin-On interfaces by following a bio-driven approach: (1) From a sensory point of view, we study how to reproduce the look and feel of the human skin through three user studies; (2) From a gestural point of view, we explore how gestures naturally performed on skin can be transposed to Skin-On interfaces; (3) From a technical point of view, we explore and discuss different ways of fabricating interfaces that mimic human skin sensitivity and can recognize the gestures observed in the previous study; (4) We assemble the insights of our three exploratory facets to implement a series of Skin-On interfaces and we also contribute by providing a toolkit that enables easy reproduction and fabrication.

## Author Keywords

Skin-on, Artificial Skin, Malleable, Deformable, Sensing, Interaction Techniques.

## CCS Concepts

•Human-centered computing → Interaction devices;  
•Hardware → Emerging interfaces;

## INTRODUCTION

Skin is a fundamental biological interface to sense the world and communicate with others [33]. Its properties (e.g. size, stretchability, etc.) motivated HCI researchers to develop On-Skin technologies to allow users to interact directly with their *own* skin [30, 59, 101]. In this paper, we share the same vision than On-skin interaction, which builds on the advantages of the skin to increase interaction bandwidth. However, we argue that the benefits of human skin should not only be used for On-skin interfaces but also for what we call Skin-On interfaces. Skin-On interfaces consist of augmenting interactive systems with artificial skin, e.g. by replacing their rigid cover. Our approach augments I/O capabilities of interactive systems with new gestures and rich kinesthetic feedback.

By exploiting the deformability of the skin, Skin-On interfaces provide novel input capabilities and haptic feedback that the users are familiar with. By mimicking real human skin, Skin-On interfaces can also better communicate the interactivity of these systems and facilitate the discoverability of gestures, which in turn enhances interaction. For instance, the back of a mobile device could be covered with artificial skin that can sense novel user gestures (e.g. grab, twist, scratch, etc.) and provide tactile and kinesthetic feedback in order to enhance user expressiveness and user experience for mediated communication or interface control.

There is a long history of research into the design of artificial skin in the field of Robotics, either to help with environment exploration, or to endow robots with human-like sensing capabilities [5, 13, 48, 94]. Artificial skin is however usually designed with aesthetic and safety requirements in mind, rather than for harvesting interactive properties of the skin that are specifically useful for human-computer interaction. Our work contributes towards this direction.

We present an exploration of the design space of Skin-On interfaces. In particular, we follow a bio-driven approach where we take inspiration from the human skin to design this new type of interfaces. Bio-inspired research is common in fields such as Robotics or Material Engineering, where it aims to abstract principles and structures from nature (e.g. mechanical abilities) to create new materials [63, 14]. Our approach shares similar goals, seeking to reproduce the sensing capabilities of biological skin, but it also goes beyond the typical bio-inspired approach by focusing on interactive aspects, which we believe are crucial for human-computer interfaces:

1. From a **sensory** point of view, we study how to reproduce the visual, tactile and kinesthetic aspects of the human skin. We motivate our use of silicone to mimic the skin deformability with reference to relevant literature. Then, through three user studies, we investigate how visual factors (color) and haptic factors (texture and thickness) impact user experience, and the perception of realism.
2. From a **gestural** point of view, we explore how gestures naturally performed on skin can be transposed to Skin-On interfaces. We use this knowledge to propose a series of gestures that are desirable for Skin-on interfaces (e.g. multi-touch touch, pressure and complex gestures such as strokes, stretching or grabbing).
3. From a **sensing** point of view, we analyze different fabrication methods to create a silicone layer that can track the previously defined gestures with a spatial acuity comparable to human skin. We also contribute a DIY fabrication method and offer an open-hardware tool enabling easy reproduction by other researchers and practitioners.

We assemble the insights from these three steps and present the implementation of several Skin-On interfaces and applications to demonstrate the added value of our approach (see Figure 1 for examples). We believe our work extends the boundary of traditional interactive devices by opening up the user experience to anthropomorphic interfaces and to new familiar organic interaction between humans and machines. This work also explores the intersection between man and machine (human augmentation) from a new perspective: Instead of augmenting the human with parts of machines, we demonstrate how machines can be augmented with parts of human. Additionally, bio-driven approaches are not mainstream in HCI research, and this study presents a new research method to create devices with novel form factors that could be suitable for areas of research such as Shape Changing Interfaces [2] [43] or Organic User Interfaces [34]. In this paper we considered one aspect (skin) but we hope our work will inspire researchers to investigate how interfaces can be designed to integrate elements from nature.

## RELATED WORK

Our work relates to on-skin interfaces in HCI, artificial skin in robotics and flexible input sensors.

### On-Skin interfaces

On-Skin or Skin-worn interfaces harness the human skin properties to create new forms of on-body interactions [50, 30, 28]

where users interact with their own skin. The challenge of On-Skin technologies is to maintain the physiological functions (e.g. thermal regulation) and interactive properties (e.g. stretchability) of the end-user skin. One approach consists of using thin epidermal overlays ( $< 50 \mu$ ) [29, 42] embedding resistive [99] or capacitive sensors. These overlays sense touch [41], multi-touch [59] or pressure [4] but can only be placed on top of the skin, and have not been designed for a repeated amount of stretch and strain. Another approach to implement On-skin interfaces without the need for additional overlays is to use optical tracking to detect gestures directly on the user skin [15, 30, 101, 87, 97, 28, 50, 61]. This allows users to benefit fully from the haptic properties of the skin even if the tracking is less accurate than with a thin sensing overlay.

In summary, like On-Skin interfaces, Skin-On interfaces also aim to use the affordances of human skin. However we do not focus on interacting directly on human skin but rather aim at mimicking its properties to augment interactive devices.

### Artificial skin

In Robotics, an “*artificial sensitive skin*” [55] imitates the sensing capabilities of human skin. Several exhaustive surveys of state-of-the-art in artificial sensitive skin have been presented [82, 48, 5, 94, 13] that clustered applications for artificial skin into two main categories. The first type of application is to use artificial skin to augment robot end-effectors to explore objects or interact with them [96, 90]. In such cases, the goal is to replicate the sensing capability of the human fingertip [35, 108, 104]. The artificial skin sensors generally have a high spatial resolution ( $1mm - 4mm$ ) but cover only small surfaces ( $2cm$ ). The second type of application is to use artificial skin to cover the surface of a robot to improve motion guidance and environment sensing [5] as a means to increase human likeness, as well as to encourage contact with end-users [3] or to replicate the camouflaging capabilities of natural cephalopods [66, 76].

In summary, designing artificial skin has thus been largely studied in the field of Robotic, but with a focus in reproducing the sensing capability of the skin [14] or its visual aspects [62] for safety, sensing or cosmetic aspects. However, previous studies on artificial skin did not consider the hypodermis layer (fat). Because of its thickness, this layer enables new gestures (e.g. squeeze) and provides kinaesthetic feedback. We are not aware of any research looking at exploiting realistic artificial skin as a new input method for interactive devices.

### Flexible sensors

Many researchers have explored the design of flexible input although these studies did not use human skin as inspiration. For instance, some studies proposed to sense bending deformations in flexible interactive devices [79, 53, 70, 89]. In those cases, the materials used are still rigid and do not allow for complex gestures such as stretching or pressure. Using fabric material can alleviate this drawback and allow for detecting stretching [23]. Parzer et al. [64] demonstrate that it is possible to detect different touch pressures by using resisting fabric materials [75], but their surface texture does not look or feel like skin, which impairs visual and tactile perception.


To go further in the direction of deformable material, some works use silicone or PDMS layers. This is the case of Stretchis [103], which provides a fabrication process of a highly stretchable interface with stretch sensing. Dielectric elastomers, which are elastic parallel-plate capacitors, can act as deformable sensors for measuring human body motion [60]. Other techniques to sense input on a stretchable surface also include Electro-Impedance-Tomography [81] or Time Domain Reflectometry [105], which are other techniques for detecting stretch and touch.

These studies rely on using a relatively thin layer for sensing deformations and some other researchers have proposed to add thickness to sensors to enrich the vocabulary of gestures. For example Follmer et al. [22, 31] use flexible substrate such as Silicone or PDMS to provide a malleable input surface that can be used to detect stretching, bending and twisting using capacitive sensors. Some other work use foam to provide additional thickness to the sensor [83, 58, 10]. Such sensors detect pressure but the foam is hardly stretchable and prevent more complex gestures such as stretching or twisting.

In summary, there have been some research aiming at creating deformable sensors, but none has looked at the skin for inspiration; moreover the gestures these sensors can detect are limited to particular ones (e.g. bending but no stretching, stretching with no pressure, or pressure deformation but no stretching etc.). It is also worth mentioning that some researchers have proposed to augment everyday life objects (particularly non-interactive ones) [109, 110, 27] but these objects are rigid.

## SKIN-ON INTERFACES: A BIO-DRIVEN APPROACH

Skin-On interfaces augment interactive systems (e.g. smart-phones) with an artificial skin. To design the artificial skin, we propose a bio-driven approach (illustrated in Figure 2) aiming to replicate the main properties of the human skin. It is thus crucial to first understand the biology of the human skin to identify its unique properties. We then use this knowledge to define the most suitable material for creating artificial skin.

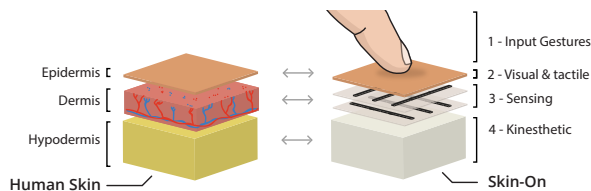

**Figure 2.** Our goal is to replicate the three layers of the human skin: The *epidermis* layer provides both visual and tactile perception (e.g. texture); The *dermis* layer is the sensory layer embedding nerves to detect mechanical contact; The *hypodermis* layer provides kinesthetic feedback due to its soft mechanical properties (viscosity, thickness, etc.).

## Human skin overview

The skin is about  $1.7m^2$  in area and approximately 4 kg in weight, thus accounting for about 5.5% of body mass. It is divided into three primary layers [20]:

- The *epidermis* is the outermost layer. It hosts multiple layers of renewed cells, with a turnover time in the order

of a month. It provides both visual and tactile feedback (typically pigmentation and texture).

- The *dermis* is the middle layer. It hosts most of the sensory receptors responding to tactile and kinesthetic feedbacks that compose touch [44]. It also hosts receptors for pain and temperature, as well as veins, hair bulbs and sweat glands.
- The *hypodermis* is the thicker part of the skin located between the skin and the muscles and is principally used for storing fat. It provides depth and resistance when human interacts with the skin, thus providing kinesthetic feedback.

## Human Skin properties

To better understand which are the desirable properties of the human skin to reproduce within artificial skin, we looked through the Biology literature [20, 36, 38] and gathered information about the visual, haptic and sensing properties of the skin (described below). We excluded properties related to biological features out of scope of this work such as the semi-impermeable barrier (useful for both fluid excretion and absorption), the anatomical barrier (preventing pathogens or preventing external damage), heat regulation, and storage (e.g. for vitamin D synthesis). We also only focused on input rather than output (e.g. self-lubrication, actuation of hair follicles or temperature) that we discuss in the future work section.

- *Pigmentation (visual)* varies between individuals and body locations and informs on the perception of age, attractiveness, mood, ethnicity or health [21].
- *Texture (visual and cutaneous haptic)*. The skin texture depends on the size of the pores and the wrinkles which also vary between individuals (age, gender) and body locations. Since pores are relatively small, wrinkles, in combination with skin pigmentation, is the main factor that determines the visual realism of the skin [6]. Wrinkles are also responsible for the haptic cutaneous (or tactile) perception of the smoothness of the skin (along with the self-lubrication and the hair, which increases friction) [69].
- *Strain/Thickness (kinesthetic haptic)*. Strain is a measure of deformation and is dependent to material thickness which, in skin, varies between individuals (age, gender) and body locations (*epidermis* from 0.3mm to 1mm [37] *dermis*: 0.9mm to 2.5mm [46, 73]; *hypodermis* from 1.9mm to 12mm [37]). Given these variations, it is not surprising to find a large variation in the elastic modulus<sup>1</sup> reported in the literature (between 0.02 MPa to 57 MPa [16]).
- *Acuity (sensing)*. Cutaneous receptors, which are part of the somatosensory system, include cutaneous mechanoreceptors (pressure and vibration), nociceptors (pain) and thermoreceptors (temperature). There are then several specialized mechanoreceptors focusing on the perception of roughness (Merkel corpuscle), stretch (Ruffini corpuscle), flutter and slip (Meissner corpuscle) or high frequency vibration (Pacinian corpuscle). The brain then integrates these various forms of information to perceive shape. Depending

<sup>1</sup>or Young's Modulus, which is the tendency of an object to deform along an axis when opposing forces are applied along that axis.

on these receptors, the skin spatial acuity varies from 2.3 mm inside the palm, 7mm on the forearm up to 15mm on the thigh [102, 96, 88].

### Design choices regarding Skin-On interface material

Moving on to reproducing the properties of the skin described above, we looked at common material used in other fields of research. Silicone has been proven to be a well suited material to reproduce the three layers of the skin (Figure 2). This material is for example used to create skin simulators for medical training [40, 86, 12] because of its mechanical properties. It is also used in the movie industry to create props and special flesh-like prosthetic effects for its texture and pigmentation. Silicone thus appears as a promising material to reproduce skin properties within Skin-on interfaces.

We use different silicone products from Smooth-On Inc to reproduce the skin properties listed above. In particular, we use DragonSkin Pro-FX [84] platinum cured silicone to create the *epidermis* and *dermis* layers. We combine it with *Silc pig* pigments for the pigmentation and mould strategies (using Mold Start) for generating specific textures. We use Ecoflex Gel [85] for the hypodermis layer where we can manipulate its thickness and strain, a highly soft and flexible silicone presenting mechanical properties close to human fat [98, 25].


While Silicone is the best available approximation of human skin, it is unclear, in an interaction context, whether similarity to human skin is the most important factor. For example it is possible that replicating the exact color of human skin may not be ideal because the human likeness is tight to the Uncanny Valley effect [56] and can elicit feelings of eeriness and revulsion in observers. Black or White colors (representative of usual device colors) might be more relevant for communicating interactivity. It is also unclear which *texture*, and which thickness is the most appropriate for interaction (as users may prefer interacting with thick viscous layers). All these questions sparked our interest in understanding how to adapt artificial skin to our interactive context. We address these points in the following section through three user studies.

### SENSORY INSPIRATION

Our exploration into simulating human skin properties starts with the replication of its sensory properties. Because these properties have a large range of values, we choose to look at the question under a different angle: how to reproduce the skin so it is valuable for interaction as well. We particularly look at the *pigmentation*, *texture* and *strain/thickness* in three studies, that helped guiding the design of our artificial skin. The fabrication of each sample follows the same process: A preparation of pigmented silicone is poured in a textured mold (80x40mm) with an even thickness. Once set, the silicone is cured a 90° for 5 minutes with a heat gun. After, we pour an even layer of Ecoflex Gel, and let it cool at room temperature for 2 hours before removing the sample from its mold.

#### Study 1: Replicating pigmentation

Our first experiment aims at understanding the impact of *pigmentation* on the perception of skin human-likeness and comfort, but also at detecting possible negative anthropomorphic effects.

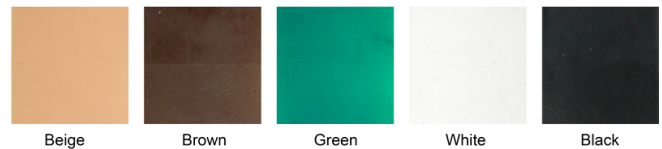


**Figure 3.** *Left: Realistic human skin colors: Beige and Brown. Center: Organic, but not human pigmentation (e.g. Alien or reptile). Right: Representative usual device colors: White and Black;*

#### Samples

Figure 3 illustrates the five types of pigmentation compared: beige and brown colors representative of realistic human skin colors; white and black colors representative of usual device colors; green color to suggest something organic, but not necessarily human (e.g. alien or reptilian).

#### Participants and experimental design

We recruited 15 participants (10 males, mean age 21) from our university to test each sample. The order of presentation of the samples was counter-balanced between participants using a Latin-Square design and a session lasted around 10 minutes. For each sample, participants indicated their levels of agreement regarding the three following affirmations, using a 5-point Likert scale: *This interface looks like an interactive device*; *This surface looks like human skin*; *It looks comfortable touching this surface*. We also asked participants to rate their impressions about the samples according to the following scales: *fake/natural*, *machinelike/humanlike*, *artificial/lifelike*, which are often used to assess anthropomorphism [9].

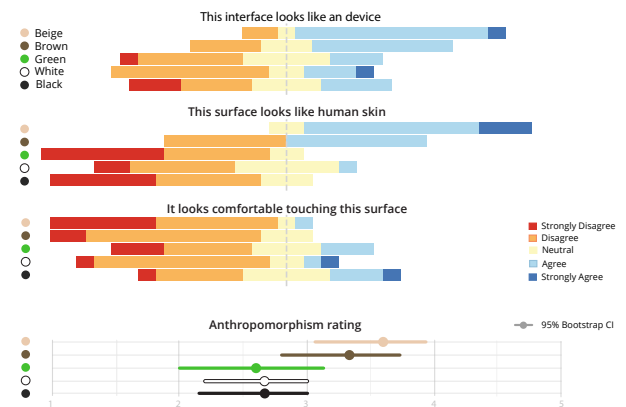

**Figure 4.** *Results of study 1 investigating the impact of pigmentation on human-likeness, comfort perception and anthropomorphism.*

#### Results of study 1

The results are illustrated on Figure 4-top. Non-parametric Friedman tests were conducted followed by post hoc comparison tests for all the questions asked. An effect was found on the following questions: *interactive* (Chi-square = 13.6,  $p < 0.05$ ) and *looks like human* (Chi-square = 36,  $p < 0.05$ ). The results suggest that the two human skin colors (beige and brown) better communicate interactivity than the others ( $p < 0.05$ ), in particular the usual white/black device pigmentation. They also confirm that beige and brown pigmentation significantly ( $p < 0.05$ ) increases the skin human-likeness in comparison with the other samples. The result of the anthropomorphism questionnaire (Figure 4-bottom) indicates that beige and brown



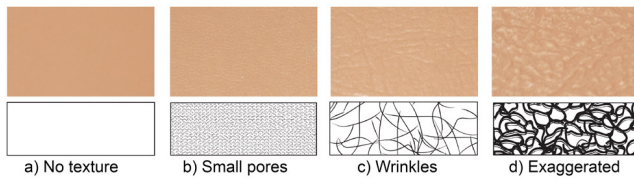


Figure 5. Textures samples considered in Study 2

skin pigmentation provides a higher level of anthropomorphism than the other colors. Finally, the results did not suggest that the two human skin colors are perceived significantly looking less comfortable than the other colors.

We expected that the black and white colors would be perceived as more interactive because of their similarity with devices, but natural skin pigmentation was associated to a higher degree of interactivity. For the following, we keep the beige pigmentation and study different textures to investigate whether it can change the opinion of users regarding comfort.

### Study 2: Replicating texture

We study different surface textures to mimic wrinkles of different body locations. We compare their effect on comfort as well as the perception of skin human-likeness.

#### Samples

Figure 5 illustrates the four samples of texture we compared. We considered two realistic human skin samples (Fig. 5 -b, c) which varied both in term of the size of the pores and the depth of the wrinkles and looked like: (b) skin of the back with small pores and no wrinkles, and (c) skin of the hand with small pores and wrinkles. We also considered two less realistic samples: (a) very smooth skin without any pores and wrinkles, and (d) skin with exaggerated pores size and wrinkles.

#### Participants and experimental design

The design was similar to study 1. We recruited 16 participants (10 male, mean age 21) from our university. The experiment was divided into two phases: in the haptic phase, the task consisted of touching lightly the different samples without seeing them to avoid any bias of the beige pigmentation. After each sample, participants indicated their level of agreement about the two following affirmations using a 5-point Likert scale: *Touching this surface feels comfortable*; *This surface feels like human skin*. In the visual phase the task was similar except that participants could only rely on the visual modality. The participants then indicated their level of agreement about this affirmation: *This surface looks like human skin*.

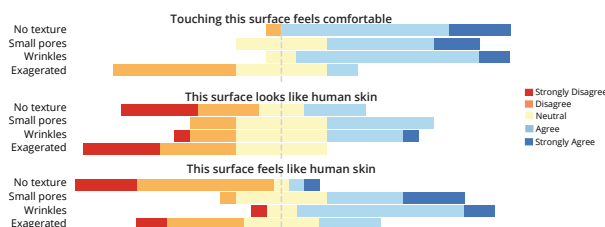


Figure 6. Results of the study 2 investigating the impact of textures on comfort and skin human-likeness



Figure 7. Different skin thickness considered in Study 3

### Results of study 2

Non-parametric Friedman tests were conducted followed by post hoc comparison tests for the questions asked. An effect was found for each: *comfortable* (Chi-square = 21.8,  $p < 0.05$ ); *feels like human* (Chi-square = 12.3,  $p < 0.05$ ); and *looks like human* (Chi-square = 18.6,  $p < 0.05$ ). The results (Figure 6) suggest that the exaggerated sample is less comfortable than the three others ( $p < 0.05$ ). They also confirm that the two realistic samples are perceived more alike skin than the two others both tactically ( $p < 0.05$ ) and visually ( $p < 0.05$ ). The main finding is that an appropriate skin-like texture seems important both for the comfort of interaction and human-likeness perception. In the next experiment, we use the texture with small pores.

### Study 3: Replicating thickness

We study the impact of the *strain/thickness* on easiness and comfort of interaction, as well as human-likeness.

#### Samples

Figure 7 illustrates the four different skin thicknesses we compared. The thickness of the top layers (epidermis+dermis) is 1.2mm as it is the average value of the dermis over the body [49, 91]. For the hypodermis thickness, we considered four values corresponding to different body areas: 2mm (face [74]), 5mm, 10mm (forearm [37]), 17mm (mean body [39]).

#### Experimental design

We used a similar design than previous studies. We recruited 16 participants (10 males, mean age 22) from our university. The task consisted of freely touching and manipulating each sample such as it was the skin of someone else. After each, participants indicated their level of agreement regarding the following affirmations with a 5-point Likert Scale: *It was comfortable doing gestures on this sample*; *It was easy doing gestures on this sample*; *This surface feels like human skin*.


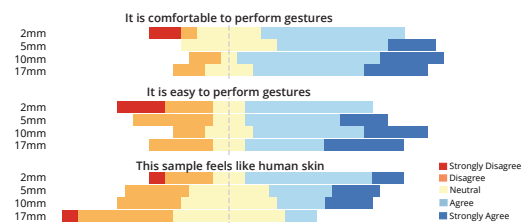


Figure 8. Results of the study 3 investigating the impact of thickness on comfort and skin human-likeness

### Results of study 3

Non-parametric Friedman tests were conducted followed by post hoc comparison tests for all the questions asked and found a main effect on the *look alike* question (chi-square = 7.4,  $p < 0.05$ ). Figure 8 illustrates the results. The sample with the thicker hypodermis layer was perceived as the less human like, as this value is usually present in body location not accessible for social touch, such as the belly ( $p < 0.05$ ). The graph

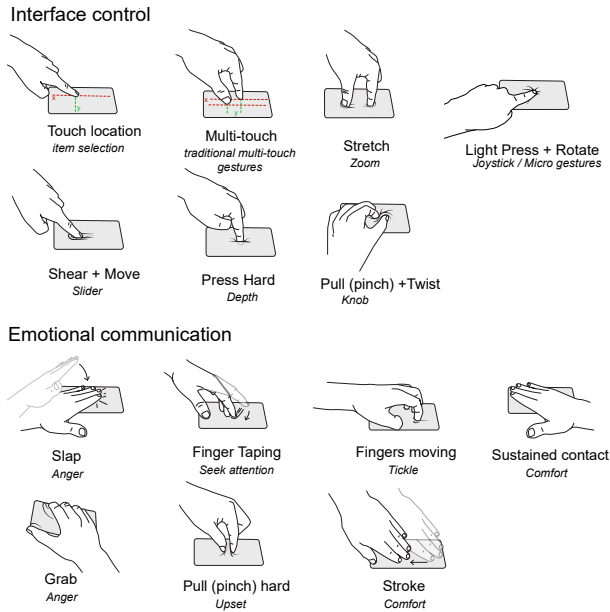

**Figure 9. Design space for Skin-On interactions, for interface control and emotional communication**

also shows that samples with a thicker layer are perceived slightly more comfortable and easier to interact or manipulate although this was not significantly different. Participants naturally compared the 5mm and 10mm with their own skin (respectively hand and forearm) suggesting that these surfaces are the most successful at replicating these skin thickness.

### Sensory exploration results

Our sensory exploration let us to form a series of guidelines for mimicking human skin for an interactive setup: for the *pigmentation* using a skin-like color; for the *texture* using a realistic skin pore and wrinkle structure; for the *thickness*, using a fat layer of 5mm to 10mm and a dermis of 1.2mm.

### INTERACTION INSPIRATION

Our next step in the design of the artificial skin was to identify the types of gestures which are desirable for Skin-On interfaces. In doing this we aimed to refine our specification for the design of the sensing aspect of the skin.

We found that the human skin affords two main types of gestures: gestures of mediated communication between individuals from the social literature [33, 32] and traditional 2D multi-touch gestures, for interface control though extracted from On-Skin literature [100]. Our design space (Figure 9) summarizes the gestures relevant for Skin-On interfaces. This list is not exhaustive and only represent gestures that are most often considered in the literature .

We also had the opportunity to observe that users spontaneously performed these gestures during the studies. Participants demonstrated gestures such as pointing or rotating with two fingers, gestures similar to regular interfaces. However, the most frequent gestures were pulling the skin (pinching), stroking and slapping, which are skin-specific gestures. These

findings corroborate with the gestures proposed in existing literature surveys [100, 33, 32]. The participants did not propose additional new gestures.

Our results suggest that users tend to transpose the interactions they are doing with real skin to artificial skin, and that artificial skin leverages the expressive gestures and tactile expressions of pro-social emotions. Gestures with similar characteristics to conventional multi-touch devices and traditional input paradigms suggest that users transpose conventional multi-touch gestures onto other interactive surfaces, like artificial skin. So, we decided to build on the gestures illustrated in Figure 9 to define the sensing capabilities of Skin-On interfaces.

### SENSING INSPIRATION

The last part of our exploration focuses on the reproduction of the human skin sensing acuity. We present different sensing techniques and discuss which ones are more adapted to mimic human skin. We then present our fabrication method and finish by presenting our hardware/software open toolkit that enables controlling the sensing layer, and demonstrate how we can detect the previously defined gestures.

#### Implementing artificial mechanoreceptors

Skin has a wide range of mechanoreceptors used conjointly to detect touch and deformations. Building skin-equivalent sensors, raises two technical challenges: (1) choosing the sensing technique and the overall electrode pattern, and then (2) choosing electrodes material compatible with artificial skin's properties to not hinder its deformability. To inform our choices we have a series of requirements:

- *Strain/thickness*: we want to reproduce the deformability of the skin as described earlier. We are particularly focused on sensing layer of thickness below 1.2mm to match human dermis thickness.
- *Accuracy*: we want to build accurate sensors that can reproduce the human skin sensing acuity and detect the gestures defined previously.
- *Accessibility*: we want to use accessible technologies, i.e. the process should be easy to reproduce by HCI practitioners with affordable material and without high-end equipment.

#### Choosing an electrode pattern

We choose to implement our sensor using a matrix layout sensing mutual capacitance. To understand the reasons behind this choice we need to explain the different techniques that can be used. There are various ways to lay out sensors to detect gestures. The most widespread and accessible techniques are either resistive or capacitive, and can use a discrete or a matrix layout.

*Discrete or matrix.* A discrete layout means that the sensor is made of individual cells spaced out on the surface of the sensor. In contrast, a matrix layout uses a grid of perpendicular lines intercepting at multiple points on the surface. We choose to use a matrix layout because it is easier to fabricate and requires less components and apparatus.

*Resistive or capacitive.* Resistive touch technology usually relies on resistance that varies when a mechanical pressure is

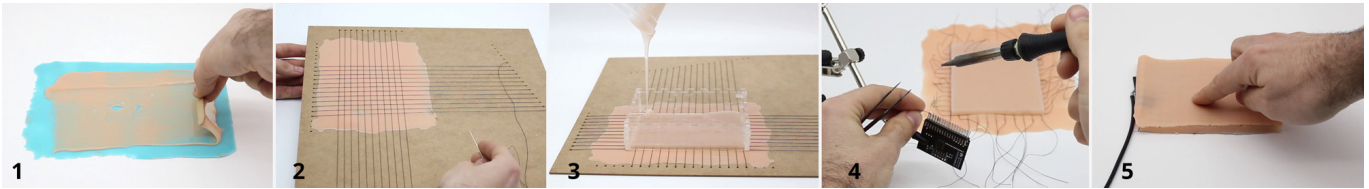


Figure 10. Fabrication process of Skin-On artificial skin. 1. Epidermis layer, 2. Electrodes, 3. Hypodermis layer, 4. Electronics, 5. Aesthetics.

applied. Resistance on a 2D sensor can be read from orthogonal electrodes with a piezoresistive material between them. This approach is often used for smart textiles [17] but requires large electrodes ( $>1\text{cm}$ ), which does not fit with our requirement of spacial acuity. Capacitive touch sensing relies on capacitance change, which occurs when the body gets close to the electrode and changes the local electric field. Capacitive sensors can be made thin and allow one to infer pressure information. They can also detect multi-touch gestures, using for instance mutual capacitance sensing [59, 110]. This technique only requires two orthogonal arrays of electrodes separated by a dielectric layer and few instrumentation. We choose this approach for all these reasons.

#### Choosing the electrodes material

To implement the electrode pattern described above, we need a conductive material that fits our requirements. We excluded solutions that rely on complex machinery or a complex fabrication process to fit with our accessible requirement. In particular, we excluded solutions such as depositing of hard conductive particles or liquid conductive metal in a microfluidic channel [57, 54]. We also tested the solutions described below before choosing to use conductive thread.

**Conductive ink.** PEDOT:PSS [51], which is a conductive ink, is more and more mainstream in fabrication research. However, the electrical resistance increases drastically after every stretch [103], which makes it impossible to build an efficient deformable sensor. Thus, we discarded this solution.

**Conductive silicone.** A common approach is to use cPDMS, a silicone material filled with carbon powder or nanotubes [52]. We tested two conductive silicones. First, we prepared a cPDMS mixing carbon black, EcoFlex 00-30 silicone and D5 solvent. A 1:1:1 ratio ensured a proper consistency for coating over stencil, and an even distribution of the carbon black allowed conductivity and stretch. Once dry, the conductivity was about  $500\text{k}\Omega/\text{cm}$ . The second silicone tested is a commercially available conductive silicone, Elastosil® LR3162 by Wacker [26]. It has a theoretical conductivity of  $2\Omega/\text{cm}$  when mixing manually, but we could not get a conductivity under  $10\text{k}\Omega/\text{cm}$ . This material allows a stretch up to 60% before breaking. Its electrical resistance is high and increases when stretched. The high electrical resistance of the electrodes make it unsuitable for mutual capacitance sensing. Another drawback of this approach is that connecting the electrodes to cPDMS is challenging to ensure a durable prototype [103].

**Conductive fabric.** We also explored conductive fabric, which is used in the DIY wearable community [17]. We used a Silver plated stretchable conductive fabric (stretch-width:65%, stretch-length:100%) to create a composite fabric + silicone

material by pouring a thin layer of silicone on top of the conductive textile. Once cured, we laser cut it to the desired pattern and sealed it into another silicone layer. The weaving structure of the material makes it durable, very conductive ( $<1\Omega/\text{cm}^2$ ), and an increased strain reduces its electrical resistance. However, its thickness was 0.8mm (about the same as the fabric thickness), which is over the size of the dermis thickness when using multiple layers (two layers are needed, plus the dielectric, which would make the sensor more than 1.2mm thick). We thus discarded this solution.

**Conductive threads.** Another approach is to use conductive threads that are sealed in a thin layer of silicone. We used conductive insulated *Datastretch* thread [93], which allows a strain up to 30%, is 0.2mm thick, and has a conductivity of  $4.2\Omega/\text{m}$ . It is less stretchable than conductive textile or cPDMS, but 30% is sufficient compared to the skin maximum strain, which is approximately of 40% [7, 24]. The threads can be positioned with a specific pattern, and electrical insulation allows superposing multiple electrodes while keeping the layer sufficiently thin. The electrode pattern can only have a limited number of electric lines, but this technique remains the fastest to fabricate and requires few material which makes it appropriate considering our requirements. As the threads are thin, the thickness of the sensing layer can be similar to the human's dermis and even smaller. Next, we explain how we used this material to fabricate our artificial skin.

#### Skin-On Fabrication Process

We now present the steps needed to fabricate our artificial skin (Figure 10). We focus here on how embedding the sensing layer impacts the fabrication process.

**1. Creating the top textured layer.** The epidermis layer is built by pouring DragonSkin silicone with beige pigments on a skin-like texture mold (Figure 10-1). A thin-film applicator is used to achieve the desired thickness (about 0.6mm).

**2. Positioning the electrodes.** Once cured, the top layer is positioned on a pane, with the texture facing down. The *Datastretch* conductive threads [93] are then placed in a perpendicular grid on top of the artificial epidermis to form the electrodes. To ensure an even spacing between the electrodes, we laser cut guide holes on the edge of the acrylic plate and then sew the thread, following the holes (Figure 10-2). The spacing between holes varies depending on the desired size of the interface and the spacial acuity. Once the electrode grid is positioned, we pour another thin layer of silicone to seal it in place. We ensure that the total interface is under 1.2mm.

**3. Adding the hypodermis.** We prepare a rectangular mold of the size of the desired artificial skin and place it on top of



the sensing layer. The hypodermis viscous silicone layer of Ecoflex Gel is poured inside the mold to reach the desired fat thickness, i.e. 10mm in this example (Figure 10-3).

**4. Connecting the electronics.** The electrodes are then connected, i.e. they are soldered to the hardware sensing platform (Figure 10-4).

**5. Shaping the Skin-On.** To improve the visual appearance of the interface, the excess of silicone can be trimmed before being folded around the side of the hypodermis layer and glued with silicone glue (Figure 10-5). For a permanent fixation on a device, either silicone glue or acetone can be used, to smoothly blend the silicone with the underneath surface. Paint or makeup can be added to shade the artificial skin with flesh-like tonal variation, thus increasing anthropomorphism.



**Figure 11.** *Left.* Open Hardware Mutual Capacitance breakout *Right.* Smartphone case prototype hardware.

### Open-toolkit for touch and gestures detection

The final step is to detect users' gestures. We present the implementation of our hardware and software toolkit and demonstrate its gesture recognition algorithm, which can detect gestures proposed in the previous section of this paper.


#### Hardware Platform

We developed an Open Source and Open Hardware multi-touch controller<sup>1</sup> with a total cost of \$4. This contribution enables DIY fabrication of multi-touch interfaces on non-conventional surfaces such as human skin [59], walls [110] or, as in our case, flexible silicone. The breakout is composed of a *FT5316DME* controller, which allows for connecting 12 sensing electrodes and 21 transmitting electrodes. Any conductive electrode with an unusual shape or using unusual material can be used for sensing and transmitting. The touch controller can transmit the raw electrodes data or 5 multi-touch coordinates via i2C, to any micro-controller. We used both an Arduino Pro Micro board for sending the data via serial communication to a laptop, and a Wemos D1 mini for transmitting the information wirelessly to the mobile device. We now explain how we detect touch contact, then more complex gestures.

#### Data processing

The process pipeline relies on OpenCV to convert the mutual capacitance readings to touch coordinates. It removes the background noise and tracks the user's points of contact with the surface. Using the data read (in serial or wireless) from the sensing and transmitting electrodes, we build a 2D image of 12x21 pixels. Each individual cross-point corresponds to the capacitance reading at a location on the sensor grid.

<sup>1</sup>MuCa Breakout, available on <https://github.com/muca-board/>

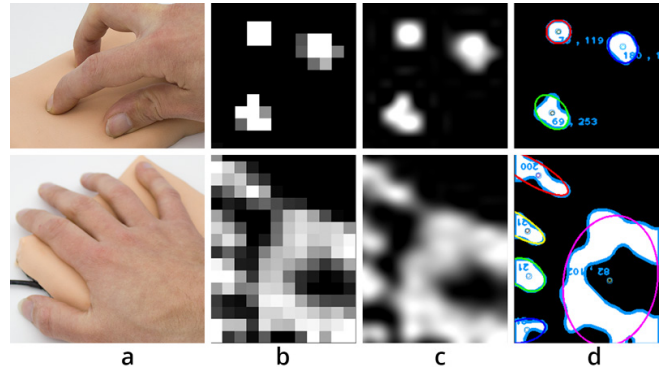

**Figure 12.** Data processing to detect multi-touch (*top*) or grab (*bottom*) gestures: *a-* Gesture, *b-*Raw sensor data, *c-*5x upscale image, *d-* Contours and Blobs detection.

To minimize the background noise, we perform an initial calibration. After the board is detected, we create a calibration matrix, by averaging the individual value of each coordinate 10 times. The interface must not be touched during this period (Figure 12-b). Incoming capacitive data is transformed by the calibration matrix (Figure 12-b), and the values are normalized and stored in an image file. We apply a threshold to remove points under 0.1%, that we consider as background noise.

To support accurate spacial interpolation, we upscale the image 5x using the Lanczos-4 algorithm (Figure 12-c). The raw image of the transformed cross-points values is then converted into a binary image with a threshold of 55%. We apply contour detection to separate distinct elements on the image as *blobs*. We calculate the relative surface of each blob area and the nearest fitting ellipsoid to get its center and orientation (Figure 12-d). The electrodes are read 16 times per second and the data processing takes 4ms in average. An API is provided to share touch points and gesture events using Unity3d.

**Touch accuracy.** Overall, our data processing algorithm provides a spacial acuity of 2mm with an electrode spacing of 4mm. This accuracy is comparable to the acuity of the human skin on the forearm. The two-point discrimination threshold of our prototype is 10mm, which is better, in average, than with the human skin [102].

**Multi-touch point detection.** The center and radius of an ellipsoid define respectively the location and strength (or pressure) of the touch point (Fig. 12-top). In a pilot study, we defined the maximum radius (5mm) that a single finger press can have on this surface (Fig. 12-c). To determine and track the position of multiple points over time, we use the contour points (stored in a k-d tree), and find the closest blob position in  $O(\log n)$ .

**Advanced gesture detection.** Advanced gestures differ from multi-touch gestures by their specific dynamic and/or the number and size of the contact area (radius larger than 1cm<sup>2</sup>). For instance, a “stroke” is characterized by a simultaneous swipe contact of at least three fingers along all the surface and a “tickling” is characterized by repeated fast finger swipes in the same direction. When the user performs a “pinch” with two fingers, circular *blobs* merge into a single ellipse with a large eccentricity. Its rotation informs on the rotation and



strength of twist. Other gestures are detected because of their large surface area. For instance, the detection of the palm of the hand has a very large surface area ( $> 50mm^2$ ). A slap is characterized by the presence of a large *blob* for a very short amount of time. On the opposite, a grab gesture (Fig. 12-bottom) is characterized by a large *blob* on a side of the surface (palm) and four ellipses with large eccentricity at the center of the surface (fingers) (Fig. 12-d).

*Gesture detection pilot study.* We ran a preliminary study with 8 participants on a subset of 8 gestures. The selected gestures are representative of the capabilities of our device: they leverage skin depth, allow multi-touch interaction, and are not a combination of basic gestures. The participants performed 3 practice trials, then 5 test trials, for a total of  $8 \times 8 \times 5 = 320$  tested gestures. The overall recognition rate was 85% (Light Press: 100%, Hard Press: 100%, Sustained Hand Contact: 88%, Stretch: 83%, Pinch: 80%, Stroke: 80%, Tickling: 78%, Slap: 73%). Although preliminary, these results are promising and demonstrate the feasibility of our approach.

## USE CASES

We first describe the implementation of three Skin-on interface prototypes with different form factors shown in Figure 1. We then present the applications we developed for these prototypes. These applications are divided into two categories: interface control and emotional communication.

### Skin-On devices form factors

#### *Skin-On smartphones*

We built a Skin-On smartphone case (Figure ??-bottom) providing advanced input and output capabilities on the back and side of a mobile device [47, 11, 80]. The interface communicates via WiFi with the Android device and the hardware (sensing breakout, battery and communication component) is self-contained within the case (Figure 11). This prototype has a dimension of 8cm x 15cm and could easily be extended to tablets.

#### *Skin-On Touchpads*

We also built a Skin-On interface for built-in and external touchpads. We created two interfaces with two different sizes and thicknesses (9cm x 12cm and 10cm x 14.5cm, thickness 7mm) that can be connected to a device via USB (Figure ??-top).


#### *Skin-On Wristband*

We also fabricated a Skin-On wristband to alleviate the limited input and output capabilities of smartwatches [65] (Figure 1-c). The wristband (10cm x 2.5cm, thickness of 5mm) illustrates how wearable devices can benefit from Skin-On interfaces. The wristband is connected to a computer that processes the data and sends back the events to the smartwatch via WiFi.

## Applications for interface control

### *Communicating interaction*

Skin-On interfaces provide natural physical affordances. The characteristics of the material can motivate users to spontaneously explore the interface and discover novel controls. For instance in study 3 we saw several users spontaneously pulling

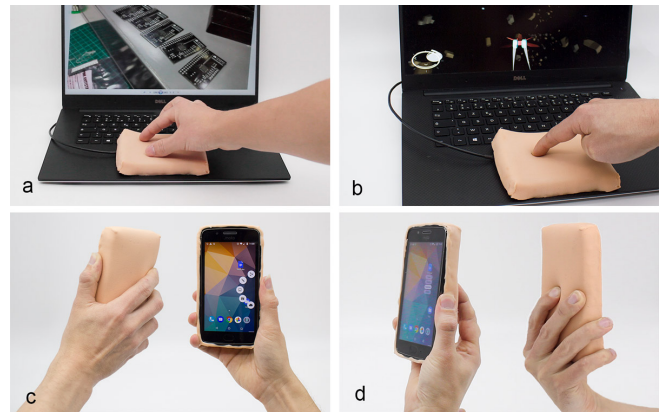

**Figure 13. Applications for interface control.** a) Leveraging physical interaction (pinch and stretch), b) Virtual joystick with micro-interactions, c) Grab detection to display an adaptive pie menu, d) a pressure menu

the skin to pinch or twist it, a gesture that users would not naturally perform on rigid touchpads. Moreover, once users discover the skin metaphor (either by themselves or after communicating with others), they may be more inclined to explore additional gestures and discover new controls.

### *Leveraging physical interaction*

Skin-On interfaces leverage physical interaction by providing haptic feedback in line with gesture input. For instance, when users are pinching or stretching a virtual image (Figure 13-a), they physically pinch and stretch the skin. Similarly, a twist gesture can be used to manipulate a tangible knob: the amplitude of the twist rotation controls the volume of a music player (Figure 1-b). Physical interaction metaphors can be useful in games, thereby providing a sense of realism. For instance, taking advantage of the elasticity of the skin, users can perform a shear gesture to execute a slingshot in the Angry-bird game.

### *Increasing the degree of control*


Skin-On interfaces allow users to perform advanced gestures with a higher degree of control. Typically, pressure-based interaction can be difficult to control since rigid surfaces cannot communicate apparent stiffness to users. In contrast, Skin-On interfaces have a much smaller stiffness, providing a higher level of control. We implemented a pressure-based menu. When selecting an icon, a light touch opens a document, a medium touch shares it, and a strong one deletes it. Rather than pressing on a flat plane, the hypodermis layer provide another level of haptic feedback. Similarly, users can perform micro-gestures [77] with a higher level of accuracy or control a 3D joystick by performing in-place rotations of the finger (Figure 13-b).

### *Increasing input bandwidth*

Skin-on interfaces allow a wide range of interactions. For instance, the Skin-On Smartphone supports back-of-device interaction [47], which let users interact with the device without occluding the screen. It can also sense how users are grabbing the device to enable additional applications or context detection [18, 19] as the skin covers both the back and the side of the smartphone. For instance, Figure 13-c shows an adaptive

Pie menu whose location depends on the handedness of the phone grasp.

Skin-on interfaces can also serve for improving small mobile devices such as smartwatches or connected objects. For instance the Skin-On wristband (Figure 1-b) can allow performing all the one-dimensional interactions (along the wristband) proposed in [65], plus some additional interactions such as 2D scrolling or continuous rotations on the wristband, e.g. to change the volume of the music, navigate in applications or send simple gestural messages to others.

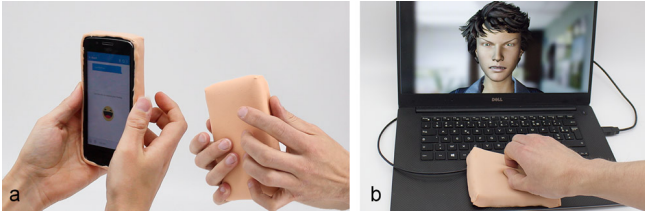

**Figure 14.** Examples of applications for emotional communication. a) Tactile expression for mediated communication, b) Communication with a virtual agent.

### Applications for emotional communication

Touch gestures on Skin-On can convey expressive messages for computer mediated communication with humans or virtual characters.

*Mobile tactile expression.* One of the main uses of smartphones is mediated communication, using text, voice, video, or a combination of them [78, 95]. We implemented a messaging application where users can express rich tactile emoticons on the artificial skin. The intensity of the touch controls the size of the emojis. A strong grip conveys anger while tickling the skin displays a laughing emoji (Figure 14-a) and tapping creates a surprised emoji. The distant user can then receive these emoticons visually, or haptically, for example using an interface like those proposed in [92].

*Virtual agent embodiment.* Embodied Conversational Agents (ECAs) are virtual human-like figures designed to communicate with individuals. They express their socio-emotional states through verbal and non-verbal behaviour, such as facial expressions [111, 72, 71]. Artificial skin can act as a mediated embodiment of the virtual character. The users can then perform social touch gestures on the skin, that is, on the virtual character, as they would normally do in human-to-human interaction. For instance, users can perform a stroke to convey their sympathy, small repeated taps to convey happiness, etc. [32], or pinch to convey annoyance (Figure 14-b). Another example is to convey that one is listening to what the ECA is saying. For example, a simple touch by the user can indicate she is paying attention to the ECA speech. The ECA then detects the touch gesture, interprets it and reacts accordingly.

### DISCUSSION AND FUTURE WORK

We now discuss future directions regarding the implementation, the concept and the approach.

*Technical evaluations.* Further tests are needed to evaluate the robustness of our system. While preliminary studies indicate that we can recognize 8 touch gestures and multi-touch ones, taking individual variability into account and using better recognition algorithms (typically relying on machine learning) would improve the recognition rate and allow distinguishing variations of these gestures (e.g. soft grab vs. hard grab). We also plan to study the factors (e.g. the number of repetitions, gesture strength, etc.) that alter the sensing capabilities and the mechanical properties of the artificial skin. In particular, the orientation of stretch gestures seems to impact the maximum strength that can be applied. Indeed, the grid layout of the electrodes facilitates the stretch in diagonal directions, where the stretch is greater than 50% while it is limited to 30% on the horizontal and vertical axes. Thus, the orientation of the artificial skin should be preferably chosen in such a way that frequent stretch gestures are performed on the diagonal of the grid. This work also brings technical challenges that are worth deepening and that are not covered in this paper, including the impact of curvature on spatial sensing acuity and signal to noise ratio.

*Additional Skin-On interfaces form factors.* We see several directions to investigate other form factors. First, it would be interesting to consider larger surfaces, such as interactive tables or, as one participant spontaneously mentioned, a Skin-On wall. Larger surfaces introduce technical challenges as there is a trade-off between the acuity and the responsiveness of the interface. However, different areas could have different acuity, as it is the case with the human body. For instance, finger tips (2.3mm) are more sensitive than the calf (45mm) [102]. Similarly, the sides of an interactive table could have a higher resolution than its center, as more interactions occur in the vicinity of the user position.

While our paper focuses on common interactive systems (PC, smartphones, smartwatches), Skin-On interfaces could also be useful in a wide range of setups, including robots and connected objects, or for extending the capabilities of everyday life objects. We envision interaction scenarios where Skin-On and On-Skin interfaces co-exist in a complementary way: the continuity of interaction across existing devices (mobile, desktop and skin-worn) would be maintained through similar skin-based interaction paradigms.

*Skin-On interfaces with output abilities.* We aim to study Skin-On interfaces as an output modality. Engagement in a social interaction can be defined as "the value that a participant in an interaction attributes to the goal of being together with the other participant(s) and of continuing the interaction" [67]. It is a crucial vector to keep the interaction going on, so that participants continue exchanging information and establishing trustworthy relationship. Showing, perceiving, adapting to each other emotion are important cues of engagement. While, so far, we have focused on conveying different types of information with Skin-On interfaces, our future aim is to perceive affect through artificial skin to reinforce engagement between interaction partners. For instance, the color of the skin could change (using thermochromatic ink) to inform about a new message or to communicate the emotional state

of the user. Similarly, the texture of the skin could change (sweat or goosebumps) to convey disgust or frustration. Shape-changing mechanisms such as air cavity [22] [1] could be used to stiffen some parts of the skin (e.g. veins, muscles) to modify the relief of the skin epidermis, thus the gesture performed on the skin. More generally, our goal is to further explore various types of anthropomorphism towards human-like devices.

*Uncanny Valley.* Uncanny valley has been principally a no-go zone in HCI [8], and our work challenges this. Emotional reactions and social acceptance of new form factors may change quickly, and they also depend on various aspects. For instance, the perception of our participants changed from Study 1 (visual condition only) to Study 2 (visual and tactile perception) although the same interfaces were used. We interpret this result as subtle interaction effects between visual and haptic perception regarding skin perception, which also depends on a combination of factors (including the duration of the interaction, the degree of realism of the device, etc.). We think this would merit a qualitative study of its own. More generally, our work explores the intersection between man and machine (human augmentation) from a new and radical perspective: instead of augmenting the human with parts of machines, we demonstrate how machines can be augmented with parts of human.

*Anthropomorphism and attachment to machines.* Humans have a biological predisposition to form attachment with social partners, and even inanimate objects, especially mobile devices [45]. Several studies on interactive stuffed animals and robots have shown that they increase human engagement [106, 107]. Using artificial skin on a device may create similar effects, and could change the engagement or affection that we have towards inanimate objects such as interactive devices. We thus believe that our anthropomorphic approach can inspire other researchers and lead to a novel generation of devices with an input system closer to nature.

*Bio-driven approach.* We presented a bio-driven approach which is singular in HCI. One challenge we faced was to conciliate an holistic approach and an iterative design. In *theory*, the different parameters of the skin should be investigated altogether. e.g. we observed that it was difficult to study the color of the skin independently from its texture. However, in *practice*, there are too many dimensions to investigate, which requires making design choices at each iteration. Further investigations are needed to provide clearer guidelines to follow a bio-driven approach in HCI, and we believe that exploring synergies with other fields such as Material engineering or Robotics will be a powerful means to further the development of advanced interactive devices [68].

## ACKNOWLEDGEMENT

This work was supported by the Engineering and Physical Sciences Research Council (grant number EPSRC EP/P004342/1, EP/M021882/1, EP/R02961X/1) and the Agence Nationale de la Recherche (ANR-17-CE33-0006 SocialTouch, ANR-16-CE33-0023 GESTURE). Authors wish also thank C. Bourget and C. Honnet for their help and constructive feedback.

## REFERENCES

- [1] Ahmed Al Maimani and Anne Roudaut. 2017. Frozen Suit: Designing a Changeable Stiffness Suit and Its Application to Haptic Games. In *Proceedings of the 2017 CHI Conference on Human Factors in Computing Systems (CHI '17)*. ACM, New York, NY, USA, 2440–2448. DOI: <http://dx.doi.org/10.1145/3025453.3025655>
- [2] Jason Alexander, Anne Roudaut, Jürgen Steimle, Kasper Hornbæk, Miguel Bruns Alonso, Sean Follmer, and Timothy Merritt. 2018. Grand Challenges in Shape-Changing Interface Research. ACM Press, 1–14. DOI: <http://dx.doi.org/10.1145/3173574.3173873>
- [3] Rebecca Andreasson, Beatrice Alenljung, Erik Billing, and Robert Lowe. 2018. Affective touch in human–robot interaction: conveying emotion to the nao robot. *International Journal of Social Robotics* 10, 4 (2018), 473–491.
- [4] Fumihito Arai, Kouhei Motoo, Paul GR Kwon, Toshio Fukuda, Akihiko Ichikawa, and Tohoru Katsuragi. 2003. Novel touch sensor with piezoelectric thin film for microbial separation. In *Robotics and Automation, 2003. Proceedings. ICRA'03. IEEE International Conference on*, Vol. 1. IEEE, 306–311.
- [5] Brenna D Argall and Aude G Billard. 2010. A survey of tactile human–robot interactions. *Robotics and autonomous systems* 58, 10 (2010), 1159–1176.
- [6] Yosuke Bando, Takaaki Kuratate, and Tomoyuki Nishita. 2002. A simple method for modeling wrinkles on human skin. In *10th Pacific Conference on Computer Graphics and Applications, 2002. Proceedings.* IEEE, 166–175.
- [7] Karlin Bark, Jason W Wheeler, Sunthar Premakumar, and Mark R Cutkosky. 2008. Comparison of skin stretch and vibrotactile stimulation for feedback of proprioceptive information. In *2008 Symposium on Haptic Interfaces for Virtual Environment and Teleoperator Systems*. IEEE, 71–78.
- [8] Christoph Bartneck, Takayuki Kanda, Hiroshi Ishiguro, and Norihiro Hagita. 2009a. My robotic doppelgänger-A critical look at the uncanny valley. In *RO-MAN 2009-The 18th IEEE International Symposium on Robot and Human Interactive Communication*. IEEE, 269–276.
- [9] Christoph Bartneck, Dana Kulić, Elizabeth Croft, and Susana Zoghbi. 2009b. Measurement instruments for the anthropomorphism, animacy, likeability, perceived intelligence, and perceived safety of robots. *International journal of social robotics* 1, 1 (2009), 71–81.
- [10] Tristan Beven, Thuong Hoang, Marcus Carter, and Bernd Ploderer. 2016. HandLog: a deformable tangible device for continuous input through finger flexion. In *Proceedings of the 28th Australian Conference on Computer-Human Interaction*. ACM, 595–604.
- [11] Christian Corsten, Bjoern Daehlmann, Simon Voelker, and Jan Borchers. 2017. BackXPress: using

- back-of-device finger pressure to augment touchscreen input on smartphones. In *Proceedings of the 2017 CHI Conference on Human Factors in Computing Systems*. ACM, 4654–4666.
- [12] AK Dąbrowska, G-M Rotaru, S Derler, F Spano, M Camenzind, S Annaheim, R Stämpfli, M Schmid, and RM Rossi. 2016. Materials used to simulate physical properties of human skin. *Skin Research and Technology* 22, 1 (2016), 3–14.
- [13] Ravinder S Dahiya, Philipp Mittendorfer, Maurizio Valle, Gordon Cheng, and Vladimir J Lumelsky. 2013. Directions toward effective utilization of tactile skin: A review. *IEEE Sensors Journal* 13, 11 (2013), 4121–4138.
- [14] J Dargahi and S Najarian. 2004. Human tactile perception as a standard for artificial tactile sensing—a review. *The International Journal of Medical Robotics and Computer Assisted Surgery* 1, 1 (2004), 23–35.
- [15] Niloofar Dezfuli, Mohammadreza Khalilbeigi, Jochen Huber, Florian Müller, and Max Mühlhäuser. 2012. PalmRC: imaginary palm-based remote control for eyes-free television interaction. In *Proceedings of the 10th European conference on Interactive tv and video*. ACM, 27–34.
- [16] S Diridollou, V Vabre, M Berson, L Vaillant, D Black, JM Lagarde, JM Grégoire, Y Gall, and F Patat. 2001. Skin ageing: changes of physical properties of human skin in vivo. *International journal of cosmetic science* 23, 6 (2001), 353–362.
- [17] Maurin Donneaud, Cedric Honnet, and Paul Strohmeier. 2017. Designing a multi-touch etextile for music performances.. In *NIME*. 7–12.
- [18] Rachel Eardley, Anne Roudaut, Steve Gill, and Stephen J Thompson. 2017. Understanding Grip Shifts: How Form Factors Impact Hand Movements on Mobile Phones. In *Proceedings of the 2017 CHI Conference on Human Factors in Computing Systems*. ACM, 4680–4691.
- [19] Rachel Eardley, Anne Roudaut, Steve Gill, and Stephen J. Thompson. 2018. Investigating How Smartphone Movement is Affected by Body Posture. In *Proceedings of the 2018 CHI Conference on Human Factors in Computing Systems (CHI '18)*. ACM, New York, NY, USA, Article 202, 8 pages. DOI: <http://dx.doi.org/10.1145/3173574.3173776>
- [20] Christopher Edwards and Ronald Marks. 1995. Evaluation of biomechanical properties of human skin. *Clinics in dermatology* 13, 4 (1995), 375–380.
- [21] Bernhard Fink, Karl Grammer, and Paul J Matts. 2006. Visible skin color distribution plays a role in the perception of age, attractiveness, and health in female faces. *Evolution and Human Behavior* 27, 6 (2006), 433–442.
- [22] Sean Follmer, Daniel Leithinger, Alex Olwal, Nadia Cheng, and Hiroshi Ishii. 2012. Jamming user interfaces: programmable particle stiffness and sensing for malleable and shape-changing devices. In *Proceedings of the 25th annual ACM symposium on User interface software and technology - UIST '12*. ACM Press, Cambridge, Massachusetts, USA, 519. DOI: <http://dx.doi.org/10.1145/2380116.2380181>
- [23] Rachel Freire, Cedric Honnet, and Paul Strohmeier. 2017. Second Skin: An Exploration of eTextile Stretch Circuits on the Body. In *Proceedings of the Eleventh International Conference on Tangible, Embedded, and Embodied Interaction*. ACM, 653–658.
- [24] AJ Gallagher, Aisling Ní Annaidh, Karine Bruyère, and others. 2012. Dynamic tensile properties of human skin. In *IRCOBI Conference 2012, 12-14 September 2012, Dublin (Ireland)*. International Research Council on the Biomechanics of Injury.
- [25] M Geerligs. 2006. *A literature review of the mechanical behavior of the stratum corneum, the living epidermis and the subcutaneous fat tissue*. Technical Report. Philips Research.
- [26] Wacker GmbH. 2019. ELASTOSIL® LR 3162 A/B LSR. (2019). <https://www.wacker.com/cms/en/products/product/product.jsp?product=9091>
- [27] Daniel Groeger and Jürgen Steimle. 2018. ObjectSkin: Augmenting Everyday Objects with Hydroprinted Touch Sensors and Displays. *Proceedings of the ACM on Interactive, Mobile, Wearable and Ubiquitous Technologies* 1, 4 (2018), 134.
- [28] Sean Gustafson, Daniel Bierwirth, and Patrick Baudisch. 2010. Imaginary interfaces: spatial interaction with empty hands and without visual feedback. In *Proceedings of the 23rd annual ACM symposium on User interface software and technology*. ACM, 3–12.
- [29] Mallory L Hammock, Alex Chortos, Benjamin C-K Tee, Jeffrey B-H Tok, and Zhenan Bao. 2013. 25th anniversary article: the evolution of electronic skin (e-skin): a brief history, design considerations, and recent progress. *Advanced materials* 25, 42 (2013), 5997–6038.
- [30] Chris Harrison, Desney Tan, and Dan Morris. 2010. Skinput: appropriating the body as an input surface. In *Proceedings of the SIGCHI conference on human factors in computing systems*. ACM, 453–462.
- [31] Liang He, Gierad Laput, Eric Brockmeyer, and Jon E Froehlich. 2017. SqueezaPulse: Adding Interactive Input to Fabricated Objects Using Corrugated Tubes and Air Pulses. In *Proceedings of the Eleventh International Conference on Tangible, Embedded, and Embodied Interaction*. ACM, 341–350.
- [32] Matthew J Hertenstein, Rachel Holmes, Margaret McCullough, and Dacher Keltner. 2009. The communication of emotion via touch. *Emotion* 9, 4 (2009), 566.



- [33] Matthew J Hertenstein, Dacher Keltner, Betsy App, Brittany A Bulleit, and Ariane R Jaskolka. 2006. Touch communicates distinct emotions. *Emotion* 6, 3 (2006), 528.
- [34] David Holman and Roel Vertegaal. 2008. Organic user interfaces: designing computers in any way, shape, or form. *Commun. ACM* 51, 6 (June 2008), 48. DOI : <http://dx.doi.org/10.1145/1349026.1349037>
- [35] Koh Hosoda, Yasunori Tada, and Minoru Asada. 2006. Anthropomorphic robotic soft fingertip with randomly distributed receptors. *Robotics and Autonomous Systems* 54, 2 (2006), 104–109.
- [36] Sadaf Hashim Hussain, Boonyapat Limthongkul, and Tatyana R Humphreys. 2013. The biomechanical properties of the skin. *Dermatologic Surgery* 39, 2 (2013), 193–203.
- [37] Kun Hwang, Hun Kim, and Dae Joong Kim. 2016. Thickness of skin and subcutaneous tissue of the free flap donor sites: a histologic study. *Microsurgery* 36, 1 (2016), 54–58.
- [38] Hamed Joodaki and Matthew B Panzer. 2018. Skin mechanical properties and modeling: A review. *Proceedings of the Institution of Mechanical Engineers, Part H: Journal of Engineering in Medicine* 232, 4 (2018), 323–343.
- [39] Hiroaki Kanehisa, Masae Miyatani, Kazumi Azuma, Shinya Kuno, and Tetsuo Fukunaga. 2004. Influences of age and sex on abdominal muscle and subcutaneous fat thickness. *European journal of applied physiology* 91, 5-6 (2004), 534–537.
- [40] SJ Kang, PJ Choi, ZW Chiang, K Labib, and N Clements. 2018. Homemade Suture Pad Construction and Efficacy for Low-Cost Training. *Irish Association for Simulation* (2018).
- [41] Hsin-Liu Cindy Kao, Christian Holz, Asta Roseway, Andres Calvo, and Chris Schmandt. 2016. DuoSkin: Rapidly prototyping on-skin user interfaces using skin-friendly materials. In *Proceedings of the 2016 ACM International Symposium on Wearable Computers*. ACM, 16–23.
- [42] Dae-Hyeong Kim, Nanshu Lu, Rui Ma, Yun-Soung Kim, Rak-Hwan Kim, Shuodao Wang, Jian Wu, Sang Min Won, Hu Tao, Ahmad Islam, and others. 2011. Epidermal electronics. *science* 333, 6044 (2011), 838–843.
- [43] Hyunyoung Kim, Celine Coutrix, and Anne Roudaut. 2018. Morphees+: Studying Everyday Reconfigurable Objects for the Design and Taxonomy of Reconfigurable UIs. In *Proceedings of the 2018 CHI Conference on Human Factors in Computing Systems (CHI '18)*. ACM, New York, NY, USA, Article 619, 14 pages. DOI : <http://dx.doi.org/10.1145/3173574.3174193>
- [44] Paul AJ Kolarsick, Maria Ann Kolarsick, and Carolyn Goodwin. 2011. Anatomy and physiology of the skin. *Journal of the Dermatology Nurses' Association* 3, 4 (2011), 203–213.
- [45] Veronika Konok, Dóra Gigler, Boróka Mária Bereczky, and Ádám Miklósi. 2016. Humans' attachment to their mobile phones and its relationship with interpersonal attachment style. *Computers in Human Behavior* 61 (2016), 537–547.
- [46] Aurélie Laurent, Frédéric Mistretta, David Bottiglioli, Karima Dahel, Catherine Goujon, Jean François Nicolas, Anca Hennino, and Philippe E Laurent. 2007. Echographic measurement of skin thickness in adults by high frequency ultrasound to assess the appropriate microneedle length for intradermal delivery of vaccines. *Vaccine* 25, 34 (2007), 6423–6430.
- [47] Huy Viet Le, Sven Mayer, and Niels Henze. 2018. InfiniTouch: Finger-Aware Interaction on Fully Touch Sensitive Smartphones. In *The 31st Annual ACM Symposium on User Interface Software and Technology*. ACM, 779–792.
- [48] Mark H Lee and Howard R Nicholls. 1999. Review Article Tactile sensing for mechatronics—a state of the art survey. *mechatronics* 9, 1 (1999), 1–31.
- [49] Y Lee and K Hwang. 2002. Skin thickness of Korean adults. *Surgical and radiologic anatomy* 24, 3-4 (2002), 183–189.
- [50] Shu-Yang Lin, Chao-Huai Su, Kai-Yin Cheng, Rong-Hao Liang, Tzu-Hao Kuo, and Bing-Yu Chen. 2011. Pub-point upon body: exploring eyes-free interaction and methods on an arm. In *Proceedings of the 24th annual ACM symposium on User interface software and technology*. ACM, 481–488.
- [51] Darren J Lipomi, Jennifer A Lee, Michael Vosgueritchian, Benjamin C-K Tee, John A Bolander, and Zhenan Bao. 2012. Electronic properties of transparent conductive films of PEDOT: PSS on stretchable substrates. *Chemistry of Materials* 24, 2 (2012), 373–382.
- [52] Darren J Lipomi, Michael Vosgueritchian, Benjamin CK Tee, Sondra L Hellstrom, Jennifer A Lee, Courtney H Fox, and Zhenan Bao. 2011. Skin-like pressure and strain sensors based on transparent elastic films of carbon nanotubes. *Nature nanotechnology* 6, 12 (2011), 788.
- [53] Jessica Lo and Audrey Girouard. 2017. Bendy: Exploring mobile gaming with flexible devices. In *Proceedings of the Eleventh International Conference on Tangible, Embedded, and Embodied Interaction*. ACM, 163–172.
- [54] Tong Lu, Lauren Finkenauer, James Wissman, and Carmel Majidi. 2014. Rapid Prototyping for Soft-Matter Electronics. *Advanced Functional Materials* 24, 22 (2014), 3351–3356. DOI : <http://dx.doi.org/10.1002/adfm.201303732>

- [55] Vladimir J Lumelsky, Michael S Shur, and Sigurd Wagner. 2001. Sensitive skin. *IEEE Sensors Journal* 1, 1 (2001), 41–51.
- [56] Masahiro Mori, Karl F MacDorman, and Norri Kageki. 2012. The uncanny valley [from the field]. *IEEE Robotics & Automation Magazine* 19, 2 (2012), 98–100.
- [57] Steven Nagels, Raf Ramakers, Kris Luyten, and Wim Deferme. 2018. Silicone Devices: A Scalable DIY Approach for Fabricating Self-Contained Multi-Layered Soft Circuits Using Microfluidics. In *Proceedings of the 2018 CHI Conference on Human Factors in Computing Systems (CHI '18)*. ACM, New York, NY, USA, Article 188, 13 pages. DOI: <http://dx.doi.org/10.1145/3173574.3173762>
- [58] Vinh Nguyen, Pramod Kumar, Sang Ho Yoon, Ansh Verma, and Karthik Ramani. 2015. SOFTii: soft tangible interface for continuous control of virtual objects with pressure-based input. In *Proceedings of the Ninth International Conference on Tangible, Embedded, and Embodied Interaction*. ACM, 539–544.
- [59] Aditya Shekhar Nittala, Anusha Withana, Narjes Pourjafarian, and Jürgen Steimle. 2018. Multi-Touch Skin: A Thin and Flexible Multi-Touch Sensor for On-Skin Input. In *Proceedings of the 2018 CHI Conference on Human Factors in Computing Systems - CHI '18*. ACM Press, Montreal QC, Canada, 1–12. DOI: <http://dx.doi.org/10.1145/3173574.3173607>
- [60] Ben O'Brien, Todd Gisby, and Iain A. Anderson. 2014. Stretch sensors for human body motion. In *Proceedings of SPIE 9056, Electroactive Polymer Actuators and Devices (EAPAD) 2014*. SPIE, San Diego, United States, 905618. DOI: <http://dx.doi.org/10.1117/12.2046143>
- [61] Masa Ogata, Yuta Sugiura, Yasutoshi Makino, Masahiko Inami, and Michita Imai. 2013. SenSkin: adapting skin as a soft interface. In *Proceedings of the 26th annual ACM symposium on User interface software and technology*. ACM, 539–544.
- [62] Jun-Ho Oh, David Hanson, Won-Sup Kim, Young Han, Jung-Yup Kim, and Ill-Woo Park. 2006. Design of android type humanoid robot Albert HUBO. In *2006 IEEE/RSJ International Conference on Intelligent Robots and Systems*. IEEE, 1428–1433.
- [63] Kate Oliver, Annala Seddon, and Richard S Trask. 2016. Morphing in nature and beyond: a review of natural and synthetic shape-changing materials and mechanisms. *Journal of Materials Science* 51, 24 (2016), 10663–10689.
- [64] Patrick Parzer, Kathrin Probst, Teo Babic, Christian Rendl, Anita Vogl, Alex Olwal, and Michael Haller. 2016. FlexTiles: a flexible, stretchable, formable, pressure-sensitive, tactile input sensor. In *Proceedings of the 2016 CHI Conference Extended Abstracts on Human Factors in Computing Systems*. ACM, 3754–3757.
- [65] Simon T Perrault, Eric Lecolinet, James Eagan, and Yves Guiard. 2013. Watchit: simple gestures and eyes-free interaction for wristwatches and bracelets. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems*. ACM, 1451–1460.
- [66] J.H. Pikul, S. Li, H. Bai, R.T. Hanlon, I. Cohen, and R.F. Shepherd. 2017. Stretchable surfaces with programmable 3D texture morphing for synthetic camouflaging skins. *Science* 358, 360 (2017), 210–214.
- [67] I. Poggi. 2007. *Mind, Hands, Face and Body. A Goal and Belief View of Multimodal Communication*. Vol. Körper, Zeichen, Kultur. Weidler Verlag.
- [68] Isabel P. S. Qamar, Rainer Groh, David Holman, and Anne Roudaut. 2018. HCI Meets Material Science: A Literature Review of Morphing Materials for the Design of Shape-Changing Interfaces. In *Proceedings of the 2018 CHI Conference on Human Factors in Computing Systems (CHI '18)*. ACM, New York, NY, USA, Article 374, 23 pages. DOI: <http://dx.doi.org/10.1145/3173574.3173948>
- [69] Pascale Quatresooz, L Thirion, C Piérard-Franchimont, and GE Pierard. 2006. The riddle of genuine skin microrelief and wrinkles. *International Journal of Cosmetic Science* 28, 6 (2006), 389–395.
- [70] Christian Rendl, David Kim, Patrick Parzer, Sean Fanello, Martin Zirkel, Gregor Scheipl, Michael Haller, and Shahram Izadi. 2016. FlexCase: Enhancing Mobile Interaction with a Flexible Sensing and Display Cover. In *Proceedings of the 2016 CHI Conference on Human Factors in Computing Systems (CHI '16)*. ACM, New York, NY, USA, 5138–5150. DOI: <http://dx.doi.org/10.1145/2858036.2858314>
- [71] Lazlo Ring, Timothy Bickmore, and Paola Pedrelli. 2016. An affectively aware virtual therapist for depression counseling. In *ACM SIGCHI Conference on Human Factors in Computing Systems (CHI) workshop on Computing and Mental Health*.
- [72] Albert Rizzo, Russell Shilling, Eric Forbell, Stefan Scherer, Jonathan Gratch, and Louis-Philippe Morency. 2016. Autonomous virtual human agents for healthcare information support and clinical interviewing. In *Artificial intelligence in behavioral and mental health care*. Elsevier, 53–79.
- [73] Gerald P Rodnan, Esther Lipinski, and Joan Luksick. 1979. Skin thickness and collagen content in progressive systemic sclerosis and localized scleroderma. *Arthritis & Rheumatism: Official Journal of the American College of Rheumatology* 22, 2 (1979), 130–140.
- [74] Rod J Rohrich and Joel E Pessa. 2007. The fat compartments of the face: anatomy and clinical implications for cosmetic surgery. *Plastic and reconstructive surgery* 119, 7 (2007), 2219–2227.
- [75] Ilya D Rosenberg, Alexander Grau, Charles Hendee, Nadim Awad, and Ken Perlin. 2009. IMPAD: an inexpensive multi-touch pressure acquisition device. In *CHI'09 Extended Abstracts on Human Factors in Computing Systems*. ACM, 3217–3222.

- [76] Jonathan Rossiter, Bryan Yap, and Andrew Conn. 2012. Biomimetic chromatophores for camouflage and soft active surfaces. *Bioinspiration and Biomimetic* 7, 3 (2012), 1–10.
- [77] Anne Roudaut, Eric Lecolinet, and Yves Guiard. 2009. MicroRolls: Expanding Touch-screen Input Vocabulary by Distinguishing Rolls vs. Slides of the Thumb. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems (CHI '09)*. ACM, New York, NY, USA, 927–936. DOI: <http://dx.doi.org/10.1145/1518701.1518843>
- [78] Mohammad Salehan and Arash Negahban. 2013. Social networking on smartphones: When mobile phones become addictive. *Computers in Human Behavior* 29, 6 (2013), 2632–2639.
- [79] Carsten Schwesig, Ivan Poupyrev, and Eijiro Mori. 2004. Gummi: a bendable computer. In *Proceedings of the SIGCHI conference on Human factors in computing systems*. ACM, 263–270.
- [80] Erh-li Early Shen, Sung-sheng Daniel Tsai, Hao-hua Chu, Yung-jen Jane Hsu, and Chi-wen Euro Chen. 2009. Double-side multi-touch input for mobile devices. In *CHI'09 Extended Abstracts on Human Factors in Computing Systems*. ACM, 4339–4344.
- [81] David Silvera Tawil, David Rye, and Mari Velonaki. 2012. Interpretation of the modality of touch on an artificial arm covered with an EIT-based sensitive skin. *The International Journal of Robotics Research* 31, 13 (Nov. 2012), 1627–1641. DOI: <http://dx.doi.org/10.1177/0278364912455441>
- [82] David Silvera-Tawil, David Rye, and Mari Velonaki. 2015. Artificial skin and tactile sensing for socially interactive robots: A review. *Robotics and Autonomous Systems* 63 (2015), 230–243.
- [83] Ross T Smith, Bruce H Thomas, and Wayne Piekarski. 2008. Digital foam interaction techniques for 3D modeling. In *Proceedings of the 2008 ACM symposium on Virtual reality software and technology*. ACM, 61–68.
- [84] Smooth-On. 2019a. DragonSkin Pro-FX Smooth On. (2019). <https://www.smooth-on.com/products/dragon-skin-fx-pro/>
- [85] Smooth-On. 2019b. Ecoflex Gel Smooth On. (2019). <https://www.smooth-on.com/product-line/ecoflex/>
- [86] Jessica L Sparks, Nicholas A Vavalle, Krysten E Kasting, Benjamin Long, Martin L Tanaka, Phillip A Sanger, Karen Schnell, and Teresa A Conner-Kerr. 2015. Use of silicone materials to simulate tissue biomechanics as related to deep tissue injury. *Advances in skin & wound care* 28, 2 (2015), 59–68.
- [87] Jürgen Steimle, Joanna Bergstrom-Lehtovirta, Martin Weigel, Aditya Shekhar Nittala, Sebastian Boring, Alex Olwal, and Kasper Hornbæk. 2017. On-Skin Interaction Using Body Landmarks. *Computer* 50 (2017), 19–27.
- [88] Joseph C Stevens and Kenneth K Choo. 1996. Spatial acuity of the body surface over the life span. *Somatosensory & motor research* 13, 2 (1996), 153–166.
- [89] Paul Strohmeier, Jesse Burstyn, Juan Pablo Carrascal, Vincent Levesque, and Roel Versteeg. 2016. Reflex: A flexible smartphone with active haptic feedback for bend input. In *Proceedings of the TEI'16: Tenth International Conference on Tangible, Embedded, and Embodied Interaction*. ACM, 185–192.
- [90] Z. Su, K. Hausman, Y. Chebotar, A. Molchanov, G. E. Loeb, G. S. Sukhatme, and S. Schaal. 2015. Force estimation and slip detection/classification for grip control using a biomimetic tactile sensor. In *2015 IEEE-RAS 15th International Conference on Humanoid Robots (Humanoids)*. 297–303. DOI: <http://dx.doi.org/10.1109/HUMANOIDS.2015.7363558>
- [91] CY Tan, B Statham, R Marks, and PA Payne. 1982. Skin thickness measurement by pulsed ultrasound; its reproducibility, validation and variability. *British Journal of Dermatology* 106, 6 (1982), 657–667.
- [92] Marc Teyssier, Gilles Bailly, Catherine Pelachaud, and Eric Lecolinet. 2018. MobiLimb: Augmenting Mobile Devices with a Robotic Limb. In *The 31st Annual ACM Symposium on User Interface Software and Technology*. ACM, 53–63.
- [93] Tibtech. 2019. DATASTRETCH. (2019). [https://www.tibtech.com/smartshop/index.php?id\\_product=157&controller=product&id\\_lang=1](https://www.tibtech.com/smartshop/index.php?id_product=157&controller=product&id_lang=1)
- [94] Mohsin I Tiwana, Stephen J Redmond, and Nigel H Lovell. 2012. A review of tactile sensing technologies with applications in biomedical engineering. *Sensors and Actuators A: physical* 179 (2012), 17–31.
- [95] Chad C Tossell, Philip Kortum, Clayton Shepard, Laura H Barg-Walkow, Ahmad Rahmati, and Lin Zhong. 2012. A longitudinal study of emoticon use in text messaging from smartphones. *Computers in Human Behavior* 28, 2 (2012), 659–663.
- [96] AB Vallbo, Roland S Johansson, and others. 1984. Properties of cutaneous mechanoreceptors in the human hand related to touch sensation. *Hum Neurobiol* 3, 1 (1984), 3–14.
- [97] Cheng-Yao Wang, Wei-Chen Chu, Po-Tsung Chiu, Min-Chieh Hsiu, Yih-Harn Chiang, and Mike Y Chen. 2015. PalmType: Using palms as keyboards for smart glasses. In *Proceedings of the 17th International Conference on Human-Computer Interaction with Mobile Devices and Services*. ACM, 153–160.
- [98] Yue Wang, Cherry Gregory, and Mark A Minor. 2018. Improving mechanical properties of molded silicone rubber for soft robotics through fabric compositing. *Soft robotics* 5, 3 (2018), 272–290.
- [99] Martin Weigel, Tong Lu, Gilles Bailly, Antti Oulasvirta, Carmel Majidi, and Jürgen Steimle. 2015. iSkin: Flexible, Stretchable and Visually Customizable

On-Body Touch Sensors for Mobile Computing. ACM Press, 2991–3000. DOI :  
<http://dx.doi.org/10.1145/2702123.2702391>

- [100] Martin Weigel, Vikram Mehta, and Jürgen Steimle. 2014. More than touch: understanding how people use skin as an input surface for mobile computing. ACM Press, 179–188. DOI :  
<http://dx.doi.org/10.1145/2556288.2557239>
- [101] Martin Weigel, Aditya Shekhar Nittala, Alex Olwal, and Jürgen Steimle. 2017. SkinMarks: Enabling Interactions on Body Landmarks Using Conformal Skin Electronics. ACM Press, 3095–3105. DOI :  
<http://dx.doi.org/10.1145/3025453.3025704>
- [102] Sidney Weinstein. 1968. Intensive and extensive aspects of tactile sensitivity as a function of body part, sex and laterality. *The skin senses* (1968).
- [103] Michael Wessely, Theophanis Tsandilas, and Wendy E. Mackay. 2016. Stretchis: Fabricating Highly Stretchable User Interfaces. In *Proceedings of the 29th Annual Symposium on User Interface Software and Technology (UIST '16)*. ACM, New York, NY, USA, 697–704. DOI :  
<http://dx.doi.org/10.1145/2984511.2984521>
- [104] Nicholas Wettels, Veronica J Santos, Roland S Johansson, and Gerald E Loeb. 2008. Biomimetic tactile sensor array. *Advanced Robotics* 22, 8 (2008), 829–849.
- [105] Raphael Wimmer and Patrick Baudisch. 2011. Modular and Deformable Touch-sensitive Surfaces Based on Time Domain Reflectometry. In *Proceedings of the 24th Annual ACM Symposium on User Interface Software and Technology (UIST '11)*. ACM, New York, NY, USA, 517–526. DOI :  
<http://dx.doi.org/10.1145/2047196.2047264>
- [106] Steve Yohanan, Mavis Chan, Jeremy Hopkins, Haibo Sun, and Karon MacLean. 2005. Hapticat: exploration of affective touch. In *Proceedings of the 7th international conference on Multimodal interfaces*. ACM, 222–229.
- [107] Steven John Yohanan. 2012. *The haptic creature: Social human-robot interaction through affective touch*. Ph.D. Dissertation. University of British Columbia.
- [108] Hanna Yousef, Mehdi Boukallel, and Kaspar Althoefer. 2011. Tactile sensing for dexterous in-hand manipulation in robotics—A review. *Sensors and Actuators A: physical* 167, 2 (2011), 171–187.
- [109] Yang Zhang, Gierad Laput, and Chris Harrison. 2017. Electric: Low-cost touch sensing using electric field tomography. In *Proceedings of the 2017 CHI Conference on Human Factors in Computing Systems*. ACM, 1–14.
- [110] Yang Zhang, Chouchang Jack Yang, Scott E Hudson, Chris Harrison, and Alanson Sample. 2018. Wall++: Room-Scale Interactive and Context-Aware Sensing. In *Proceedings of the 2018 CHI Conference on Human Factors in Computing Systems*. ACM, 273.
- [111] Ran Zhao, Alexandros Papangelis, and Justine Cassell. 2014. Towards a dyadic computational model of rapport management for human-virtual agent interaction. In *Intelligent Virtual Agents*. Springer, 514–527.